

(12) UK Patent Application (19) GB (11) 2 158 793 A

(43) Date of printing by UK Office 20 Nov 1985

(21) Application No 8515280

(22) Date of filing 27 Sep 1984

(30) Priority data

(31) 833881 (32) 25 Oct 1983 (33) NO

(86) International application data
PCT/NO84/00041 No 27 Sep 1984

(87) International publication data
WO85/01970 En 9 May 1985

(51) INT CL⁴ (As given by ISA)
E01D 15/14 // B63B 27/14 B65G 69/28

(52) Domestic classification
B7J 118

(56) Documents cited by ISA
GB 1099271 US 3808626
SE B 0305734 US 3310823

(58) Field of search by ISA
INT CL³ E 01 D 15/00, 06-14, 19/10; B 63 B 27/14; B 64 F
1/30, 305, 32; B 65 G 69/28; E 04 G 3/00-16
US CL 14; 17, 18, 19, 71, 5 including SE, NO, DK, FI
classes as above


(71) Applicant
Stellingsbygg A/S (Norway),
Badehusgaten 2, N-4000 Stavanger, Norway

(72) Inventor
Gustav Krag

(74) Agent and/or Address for Service
Marks & Clerk, 57-60 Lincoln's Inn Fields, London,
WC2A 3LS

(54) Gangway arrangement

(57) A gangway arrangement comprising a longitudinal bracing means (10) which forms support means for a series of gangway sections (23) having associated rail-forming side members (21, 22). The gangway sections (23) are connected to the bracing means (10) via support members (19, 20) which are displaceably mounted on the same. The support means (19, 20) are fixable in different arbitrary positions on the bracing means (10). The gangway sections (23) with associated rail-forming side members (21, 22) and support members (19, 20) are telescopically collapsible on the bracing means (10).

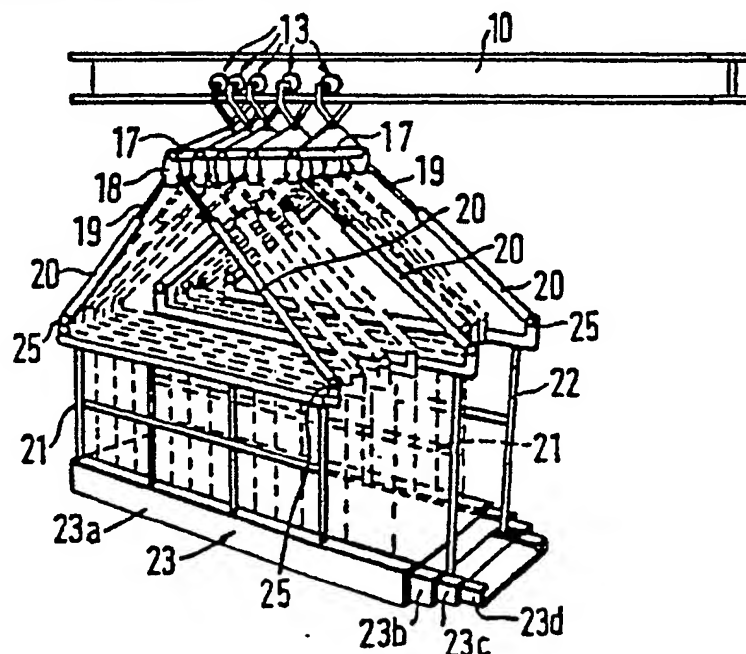

BEST AVAILABLE COPY

GB 2 158 793 A

(12) UK Patent Application

(19) GB (11) 2 246 992 A⁽¹³⁾

(43) Date of A publication 19.02.1992

(21) Application No 9120166.5

(22) Date of filing 20.09.1991

(71) Applicant
Alan Cundall
36 Oakland Drive, Upton, Wirral, Merseyside, L49 6JL,
United Kingdom

(72) Inventor
Alan Cundall

(74) Agent and/or Address for Service
Sanderson & Co
34 East Stockwell Street, Colchester, Essex, CO1 1ST,
United Kingdom

(51) INT CL⁶
B63B 27/14

(52) UK CL (Edition K)
B7J J118

(56) Documents cited
GB 1575495 A GB 1566794 A EP 0030909 A2
WO 87/02723 A1

(58) Field of search
UK CL (Edition K) B7J
INT CL⁶ B63B 27/14

(54) Gangway

(57) A gangway system for transferring personnel and/or cargo or equipment between a ship and an oil platform comprises an elongate articulated structure to span between the vessel and the platform. A pedestal 4 is provided mounting the structure at an inner end for hinge-like movement relative to the ship about a generally horizontal axis. The pedestal permits the structure to be swivelled, relative to the site, about a generally vertical axis. The structure has at least two parts (12, 14) connected one to another for hinge-like relative movement about a generally horizontal axis or axes. Means 22 is provided at an outer end of the structure for coupling it to the platform while permitting universal movement therebetween, for example using an electromagnet 20.

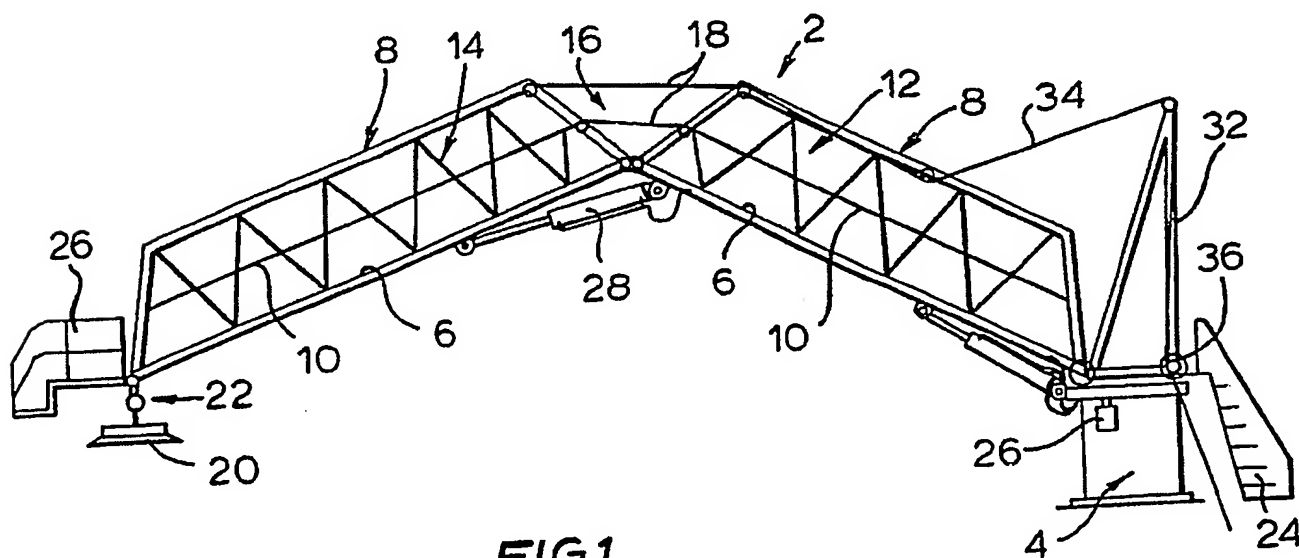


FIG.1

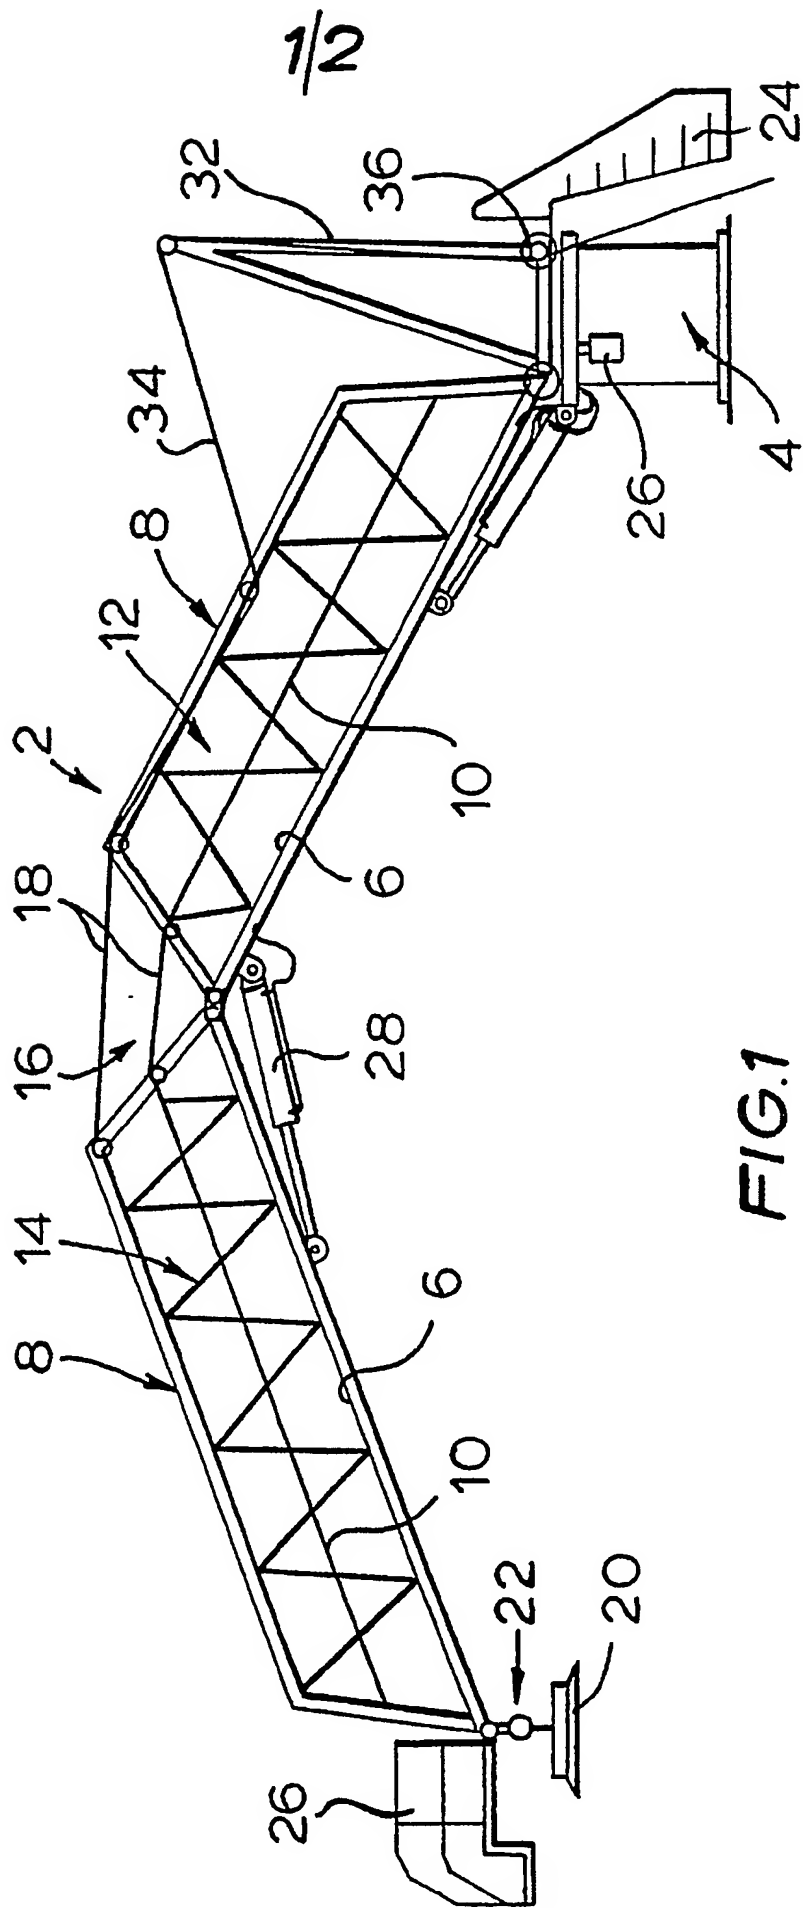


FIG. 1

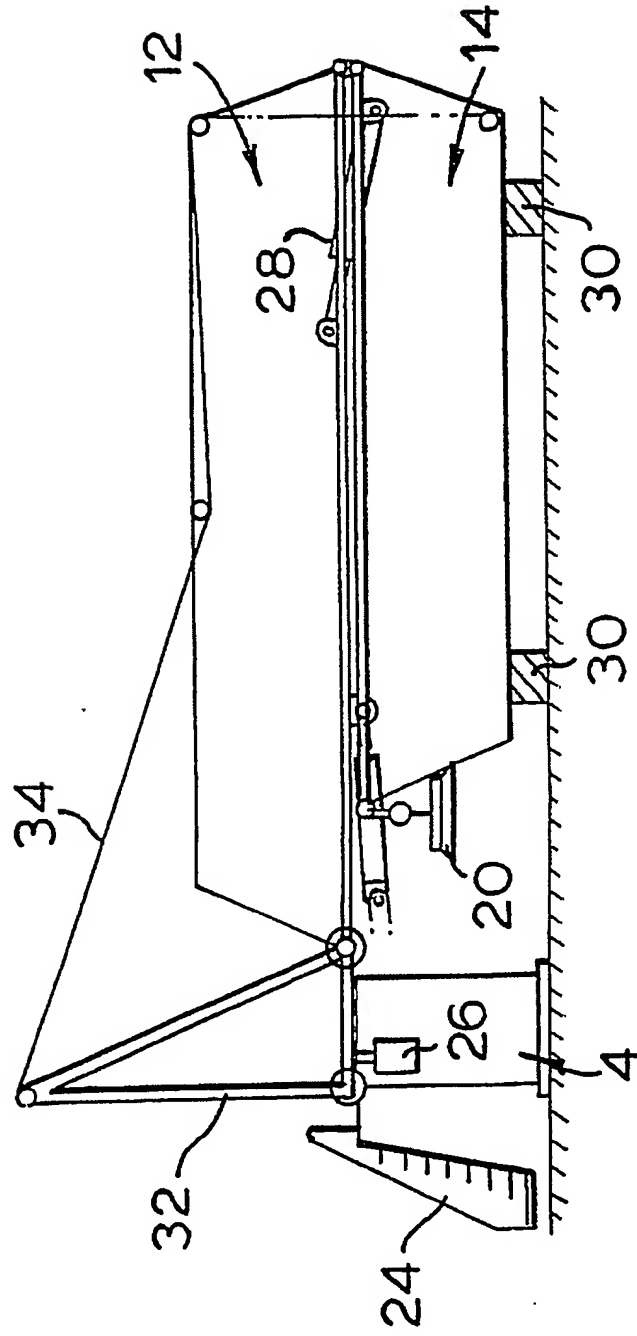


FIG. 2

GANGWAY

This invention relates to gangways.

The background of the invention will be explained in relation to the problems of transfer from a supply ship to an off shore oil platform. The invention is not limited to this application, however, and other
5 uses will doubtless occur to the reader some, perhaps, outside the environment of shipping.

For maintenance and other necessary purposes, personnel are transferred by helicopter to those off
10 shore oil platforms which are not normally manned. In order to reduce the costs of working on such platforms it would be desirable to transfer personnel from a supply ship. Conventional gangways, which may be telescopic or fixed in length, are unsuitable for
15 transfers in seas of any significant size due to the relative motion between the vessel and the platform. For example there have been proposals to use a gangway fixed to the vessel at an inner end. In use it would drop down onto the platform at the outer end which
20 would not be attached to the platform in order to accommodate the movement between the vessel and the platform. Even when the ship's position is controlled by a dynamic positioning system, there will remain a degree of horizontal movement of the ship relative to
25 the platform so that the outer end of the gangway will move around correspondingly, perhaps through a 2 meter

diameter circle. In, say, force 6 strength winds, there is an accompanying relative vertical movement of the vessel up to, say, 5 meters. If the end of the conventional gangway stays in contact with the platform, the vertical movement of the ship would produce a horizontal movement of the gangway on the platform and this would be added to the movement produced by horizontal movement of the ship which, in total would be dangerous and generally unsatisfactory.

Against this background, the a first aspect of invention provides a gangway system for transferring personnel and/or cargo or equipment between two sites (e.g. one on a ship and an the other on an oil platform) when there is limited movement between the sites, the system comprising: an elongate articulated structure for spanning between the two sites; mounting means at an inner end of the structure for mounting it on a first one of the sites, said mounting means permitting hinge-like movement of the structure, relative to the site, about a generally horizontal axis, and permitting the structure to be swivelled, relative to the site, about a generally vertical structure; the structure having at least two parts connected one to another for hinge-like relative movement about a generally horizontal axis or axes; and means at an outer end of the structure for coupling it to the other site while permitting universal movement

therebetween.

The gangway can accommodate all degrees of relative movement between a ship and an oil platform, i.e. surge, sway, yaw, pitch and roll, while both ends
5 are attached to fixed points, one on the vessel and one on the platform. On the vessel, the gangway may swivel and the spanning structure may incline more or less to the horizontal as the vessel moves relative to the platform, but its inner end stays in one place. On the
10 platform, the gangway may swivel and incline similarly to these movements on the ship and to these movements there is added pitching movement. However, the outer end, again, remains in one place. It is proposed that the gangway may be used to connect a ship to an off
15 shore oil platform for extended periods so that personnel can have living quarters on the ship whilst working on the rig. At such times personnel would have an immediate escape route to the ship in case of emergency.

20 Although the gangway could be extended manually and indeed, there may be a manually operated system for use as a back up, it preferably includes actuators and/or motors for positioning the structure relative to the first site about both axes and for positioning the
25 parts of the structure relative to one another, and means for rendering the actuators and/or motors inactive once the structure is connected to the second

site so as to accommodate said limited movement.

Thus if the actuators and/ or motors are hydraulic, for example, valves must be provided to allow relative movement once the gangway is connected or movement of the ship, say, relative to the platform will cause damage.

In a preferred form, the mounting comprises a pedestal rotatably mounted on said one site to permit the structure to be swivelled, the pedestal containing means to power the actuators and/or motors and a motor and/or actuator to swivel the structure.

Preferably, the gangway has a hydraulic motor for swivelling the structure and hydraulic actuators for positioning structure relative to the first site about the generally horizontal axis and for positioning the parts of the structure relative to one another, and the pedestal contains a hydraulic power pack arranged to drive the motor and actuators.

Most preferably, the means for coupling the structure to the second site includes an electromagnet mounted at the outer end of the structure by a universal joint and operable from the first site.

Although it is preferred that the universal movement is provided at the platform end of the gangway, it is possible for it to be provided elsewhere especially if the structure is suspended from, say a crane.

In accordance with a second aspect, the invention therefore extends to a gangway system for transferring personnel and/or cargo or equipment between two sites (e.g. one on a ship and the other on an oil platform) when there is limited movement between the sites, the system comprising: an elongate articulated structure for spanning between the two sites; mounting means at an inner end of the structure for mounting it on a first one of the sites, said mounting means permitting at least hinge-like movement of the structure, relative to the site, about a generally horizontal axis, and permitting the structure to be swivelled, relative to the site, about a generally vertical structure; the structure having at least two parts connected one to another for at least hinge-like relative movement about a generally horizontal axis or axes; and means at an outer end of the structure for coupling it to the other site while permitting at least hinge-like movement of the structure, relative to the site, about a generally horizontal axis, and permitting the structure to be swivelled, relative to the site, at least one of the mounting means connecting means and coupling means permitting universal movement.

One embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a side elevation of a gangway

embodying the invention, extended for attachment to an oil platform; and

Figure 2 is a side elevation of the gangway when stowed.

5 Referring to the drawings, the gangway comprises an elongate articulated structure which is mounted at one end on a pedestal 4 on the deck of a supply ship. The structure provides a non-slip walkway 6 enclosed by an aluminium box girder framework 8 incorporating
10 handrails 10, lighting and emergency backup lighting (not shown).

The structure which provides a bridge between the ship and an oil platform, or between two vessels, is in two parts 12 and 14 connected by pins (not shown)
15 approximately in the middle of the span, to allow hinge-like movement between the two parts about a generally horizontal axis. The frames 8 of the two parts 12 and 14 are linked across a gap 16, necessary to accommodate movement between the parts, by steel
20 wires 16 held in tension by means not shown.

At its inner end the structure is mounted on the pedestal 4 by pins which allow hinge-like movement about a generally horizontal axis. The pedestal 4 itself is rotatable about a generally vertical axis, so
25 that the whole structure can swivel about the vertical axis with the pedestal.

An electromagnet 20, supplied with electricity

from the ship, is mounted at the outer end of the structure by a ball and socket universal joint 22.

In use the bridge extends between the ship and the platform to which it is secured by the electromagnet
5 20. Although the ship may be maintained on station by a dynamic positioning system, there will be some relative movement between the ship and the platform. For example in wind strength of, say, force 6, there may be vertical movement of about 5 metres and
10 horizontal movement constrained to a 2 metre diameter circle. The gangway will accommodate all degrees movement of the ship relative to the platform, namely surge, sway, yaw, pitch and roll, while both ends are attached one by the pedestal to the vessel and one by
15 the electromagnet to the platform. Pitching, in particular, of the vessel is accommodated by the universal joint 22.

A ladder 24 may be provided for convenient access over the pedestal to the walkway. A platform 26 is
20 pivotally mounted at the outer end of the structure and may be adjusted generally horizontal facilitate stepping off onto the platform.

In order to position the structure between the vessel and the platform, the pedestal 4 contains a
25 hydraulic power pack to drive a hydraulic motor 26 for swivelling the pedestal and hydraulic rams 28 for adjusting the inclination of the parts 12 and 14 of the

structure. The electromagnet 20 and the hydraulics can all be controlled from the vessel's bridge or from the pedestal.

As the electromagnet is activated hydraulic valves
5 are operated to permit each of the hydraulic actuators 28 and motor 26 to move, relatively freely, in order to allow the movement of the parts relative to each other and the pedestal, which movement is necessary in order to accommodate the movement of the vessel
10 relative to the platform.

In order to stow the gangway, the electromagnet is de-activated and the hydraulics are activated so that the rams lift the end of the structure clear of the platform. The outer part 14 is folded under the
15 inner part 12 and the pedestal 26 is swivelled so that the structure lies over a cradle shown in section at 30 onto which it is lowered as shown in Figure 2.

A pylon 32 is mounted on the pedestal 4 to support an emergency operating cable 34. The cable is
20 controlled by a winch 36 which may be operated manually or by an electrical motor (not shown) powered by the ship's emergency supply. The end of the cable 34 is attached to the outer part 14 of the structure so that operating the winch 36 will initially lift the part 14
25 from a position hanging more or less vertical from the end of the part 12, to a position folded against a stop beneath the part 12. The pedestal is then

swivelled to position the structure over its cradle.
and the winch is reversed to lower the structure onto
its cradle.

CLAIMS

1. A gangway system for transferring personnel and/or cargo or equipment between two sites (e.g. one on a ship and an the other on an oil platform) when there is limited movement between the sites, the system
5 comprising: an elongate articulated structure for spanning between the two sites; mounting means at an inner end of the structure for mounting it on a first one of the sites, said mounting means permitting hinge-like movement of the structure, relative to the site,
10 about a generally horizontal axis, and permitting the structure to be swivelled, relative to the site, about a generally vertical structure; the structure having at least two parts connected one to another for hinge-like relative movement about a generally horizontal axis or
15 axes; and means at an outer end of the structure for coupling it to the other site while permitting universal movement therebetween.

2. A gangway as claimed in claim 1, including actuators and/or motors for positioning the structure
20 relative to the first site about both axes and for positioning the parts of the structure relative to one another, and means for rendering the actuators and/or motors inactive once the structure is connected to the second site so as to allow said limited movement.

25 3. A gangway as claimed in claim 2, wherein the mounting comprises a pedestal rotatably mounted on

said one site to permit the structure to be swivelled, the pedestal containing means to power the actuators and/or motors and a motor and/or actuator to swivel the structure..

5 4. A gangway as claimed in claim 3, including
a hydraulic motor for swivelling the structure,
hydraulic actuators for positioning the structure
relative to the first site about the generally
horizontal axis and for positioning the parts of the
10 structure relative to one another, and wherein the
pedestal contains a hydraulic power pack arranged to
drive the motor and actuators

5. A gangway as claimed in any preceding
claim, wherein the means for coupling the structure to
15 the second site includes an electromagnet mounted at
the outer end of the structure by a universal joint and
operable from the first site.

6. A gangway system for transferring personnel
and/or cargo or equipment between two sites (e.g. one
20 on a ship and the other on an oil platform) when
there is limited movement between the sites, the system
comprising: an elongate articulated structure for
spanning between the two sites; mounting means at an
inner end of the structure for mounting it on a first
25 one of the sites, said mounting means permitting at
least hinge-like movement of the structure, relative to
the site, about a generally horizontal axis, and

permitting the structure to be swivelled, relative to the site, about a generally vertical structure; the structure having at least two parts connected one to another for at least hinge-like relative movement about
5 a generally horizontal axis or axes; and means at an outer end of the structure for coupling it to the other site while at least permitting hinge-like movement of the structure, relative to the site, about a generally horizontal axis, and permitting the structure to be
10 swivelled, relative to the site, at least one of the mounting means connecting means and coupling means permitting universal movement.

Amendments to the claims
have been filed as follows

1. A gangway system for transferring personnel and/or cargo or equipment between two sites (e.g. one on a ship and the other on an oil platform) when there is limited movement between the sites, the system comprising: an elongate articulated structure for spanning between the two sites; mounting means at an inner end of the structure for mounting it on a first one of the sites, said mounting means permitting hinge-like movement of the structure, relative to the site, about a generally horizontal axis, and permitting the structure to be swivelled, relative to the site, about a generally vertical axis; the structure having at least two parts connected one to another for hinge-like relative movement about a generally horizontal axis or axes; and means at an outer end of the structure for coupling it to the other site while permitting universal movement therebetween.

2. A gangway as claimed in claim 1, including actuators and/or motors for positioning the structure relative to the first site about both axes and for positioning the parts of the structure relative to one another, and means for rendering the actuators and/or motors inactive once the structure is connected to the second site so as to allow said limited movement.

3. A gangway as claimed in claim 2, wherein the mounting comprises a pedestal rotatably mounted on

permitting the structure to be swivelled, relative to the site, about a generally vertical structure; the structure having at least two parts connected one to another for at least hinge-like relative movement about a generally horizontal axis or axes; and means at an outer end of the structure for coupling it to the other site while at least permitting hinge-like movement of the structure, relative to the site, about a generally horizontal axis, and permitting the structure to be swivelled, relative to the site, at least one of the mounting means connecting means and coupling means permitting universal movement.

7. A gangway system for transferring personnel and/or cargo or equipment between two sites (e.g. one on a ship and the other on an oil platform) when there is limited movement between the sites, the system comprising: an elongate articulated structure for spanning between the two sites; mounting means at an inner end of the structure for mounting it on a first one of the sites, said mounting means permitting hinge-like movement of the structure, relative to the site, about a generally horizontal axis, and permitting the structure to be swivelled, relative to the site, about a generally vertical axis; the structure having at least two parts connected one to another for hinge-like relative movement about a generally horizontal axis or axes; means at an outer end of the structure for

coupling it to the other site while permitting universal movement therebetween; actuators and/or motors for positioning the structure relative to the first site about both axes and for positioning the parts of the structure relative to one another; and means for rendering the actuators and/or motors inactive once the structure is connected to the second site so as to allow said limited movement.

8. A gangway system for transferring personnel and/or cargo or equipment between two sites (e.g. one on a ship and the other on an oil platform) when there is limited movement between the sites, the system comprising: an elongate articulated structure for spanning between the two sites; mounting means at an inner end of the structure for mounting it on a first one of the sites, said mounting means permitting hinge-like movement of the structure, relative to the site, about a generally horizontal axis, and permitting the structure to be swivelled, relative to the site, about a generally vertical axis; the structure having at least two parts connected one to another for hinge-like relative movement about a generally horizontal axis or axes; and an electromagnet mounted at the outer end of the structure by a universal joint and operable from the first site, for coupling the structure to the second site.

9. A gangway system for transferring personnel

and/or cargo or equipment between two sites (e.g. one
on a ship and the other on an oil platform) when
there is limited movement between the sites, the system
comprising: an elongate articulated structure for
5 spanning between the two sites; mounting means at an
inner end of the structure for mounting it on a first
one of the sites, said mounting means permitting hinge-
like movement of the structure, relative to the site,
about a generally horizontal axis, and permitting the
10 structure to be swivelled, relative to the site, about
a generally vertical axis; the structure having at
least two parts connected one to another for hinge-like
relative movement about a generally horizontal axis or
axes; means at an outer end of the structure for
15 coupling it to the other site while permitting
universal movement therebetween; actuators and/or
motors for positioning the structure relative to the
first site about both axes and for positioning the
parts of the structure relative to one another; and
20 means operable to allow movement of the parts relative
to each other and the first site in order to
accommodate the movement between the sites.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.